

C	
Max. Hubkraft	5800 kg/56,9 kN
Reichweite	Hubkraft
4,2 m	4650 kg/45,6 kN
6,2 m	3000 kg/29,4 kN
8,2 m	2200 kg/21,6 kN
10,3 m	1700 kg/16,7 kN
12,5 m	1380 kg/13,5 kN
14,7 m*	1120 kg/11,0 kN
16,8 m*	940 kg/9,2 kN

D	
Max. Hubkraft	5700 kg/55,9 kN
Reichweite	Hubkraft
4,3 m	4450 kg/43,7 kN
6,3 m	2850 kg/28,0 kN
8,3 m	2050 kg/20,1 kN
10,4 m	1580 kg/15,5 kN
12,5 m	1260 kg/12,4 kN
14,7 m	1080 kg/10,6 kN
16,9 m*	890 kg/8,7 kN
18,9 m*	620 kg/6,1 kN

C PJ060B JV2

PALFINGER

PK 22002-EH D

TRAGLAST DIAGRAMM

Abstützsituation:


Vollabgestützt

100143498 / S304-SKE


MAN|TGS

HPSC




-Stütze nicht aktiv
-Stütze aktiv
- %Auslegerhub




A: 1.080kg
B: 1.440kg
C: 2.250kg





A: 1.080kg
B: 1.440kg
C: 2.250kg

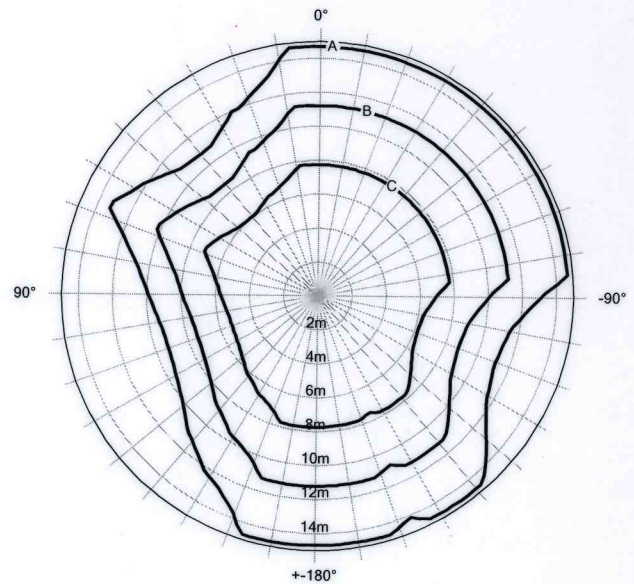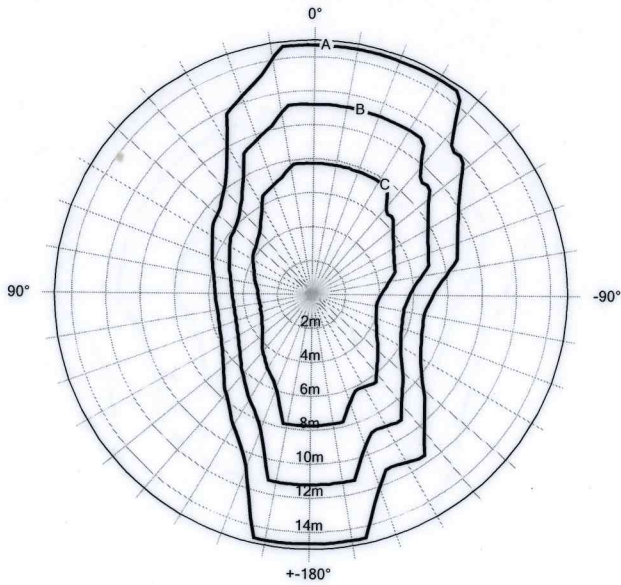

A: 1.080kg
B: 1.440kg
C: 2.250kg



A: 1.080kg
B: 1.440kg
C: 2.250kg

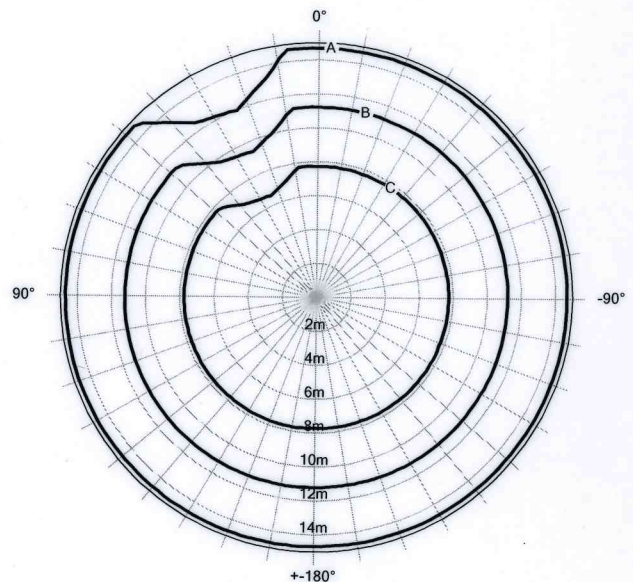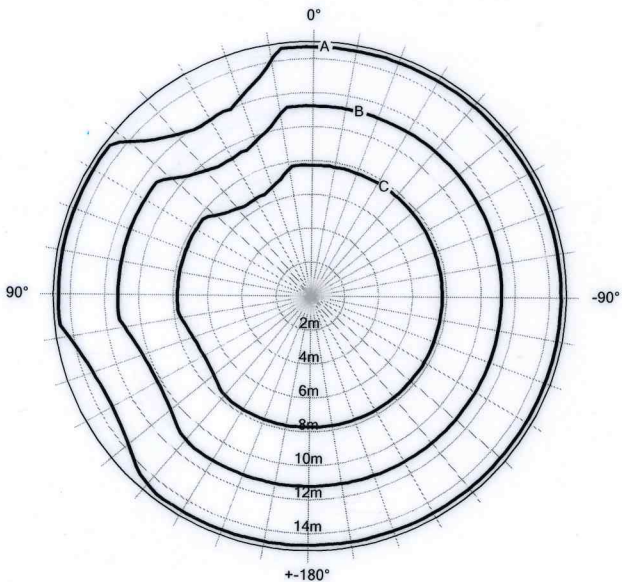

Lastwerte entsprechen den vom Aufbau eingestellten PALTRONIC Parametern

Aufbau Datum: 2232012

Aufbauer ID: DESCHWA10566E002/626476186666